
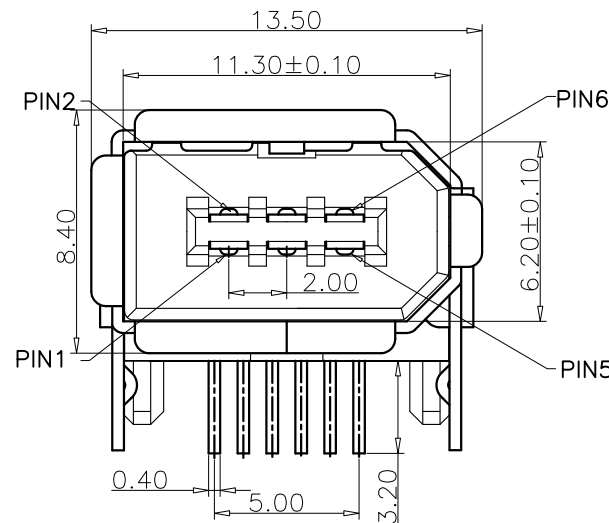
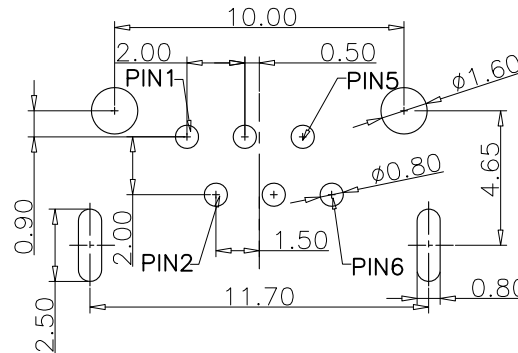
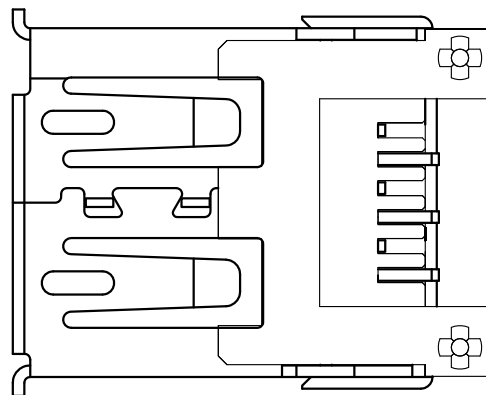
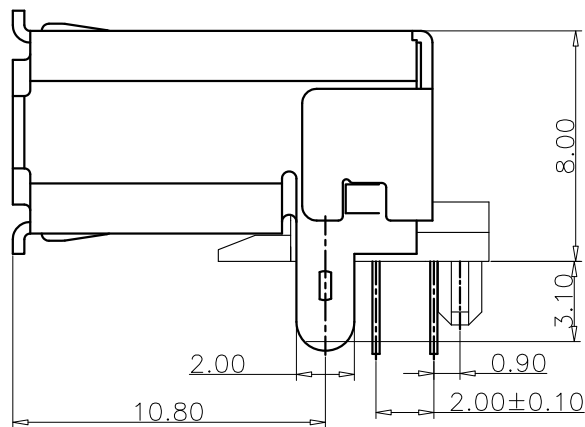


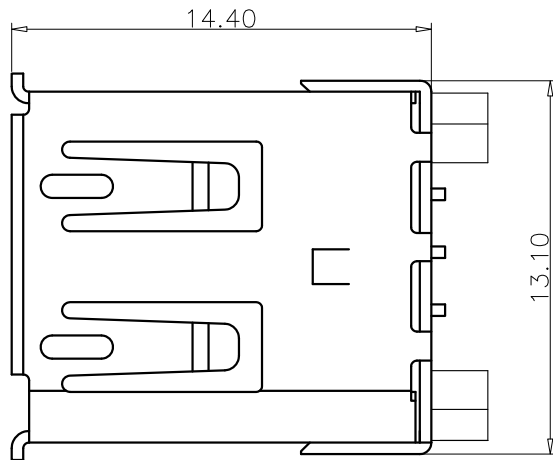

Specifications

A. Material

Plastic cement: LCP, Black
Contact: Copper Alloy, T=0.25mm
Shell: Copper Alloy, T=0.40mm

B. Plating

Contact Area: 1u" Au over 50u' min. Nickel
Solder Tails: 100u" min. Matte Tin over 50u' min. Nickel
Shell: 60u" min. Nickel

C. Electrical

Current Rating: 1.0A/contact terminal
Voltage Rating: 30V
Power Rating: 30W
Contact Resistance: 40mΩ max initial
50mΩ max after test
Dielectric Withstanding Voltage: 100V AC
Insulation Resistance: 100MΩ min.

D. Mechanical & Environmental


Operating Temperature: -25°C to +85°C
Insertion force: 39 N Max
Withdrawal force: 7.0 N Min
Contact retention: 5.0N Min
Durability: 5000 cycles

Part Number			Product Description		
PI4FW-R23A-001			IEEE 1394 Receptacle, Horizontal, 6Pin, SMT, Top Mount, With Shell Stakes		
DWG.No.	P-I4F-001		Tolerances Unspecified		Units:
Revision	A0		X.X ±0.35	X° ±5°	Metric(mm)
Designed	Lee	10/20/20	X.XX ±0.25	X.X° ±2°	
Approved	Allen	10/20/20	X.XXX ±0.15		




www.szywf.com.cn
www.szywf.cn


Sheet No. 1/2

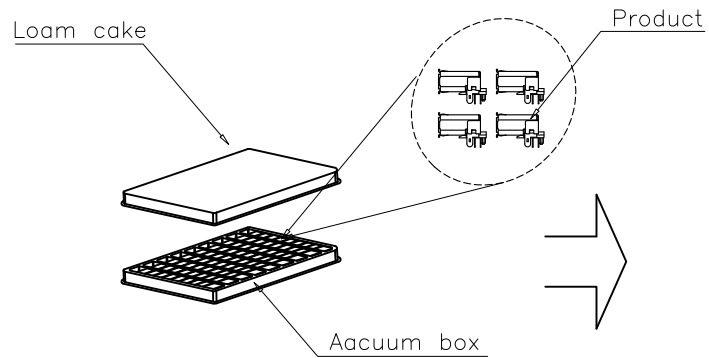


① PE vacuum box (1Set)




② 100Pcs/ box, all around with a stapler.

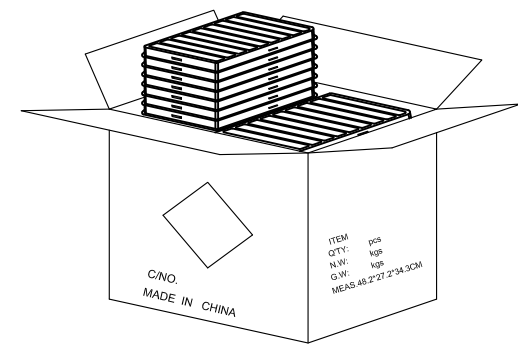


③ 50 boxes/box(5K Pcs)

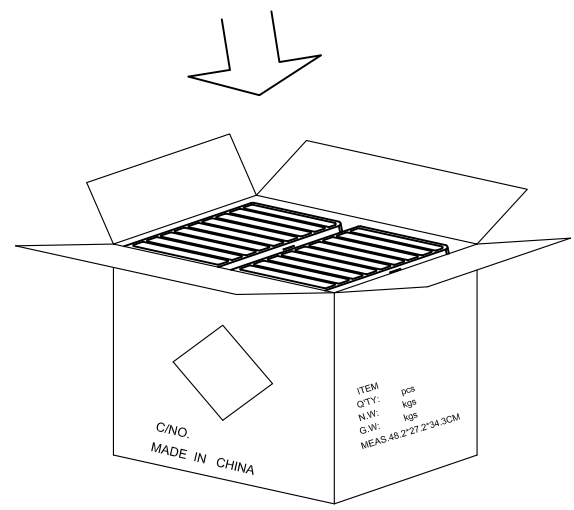

④ 25 boxes *2 per box, if the mantissa boxes are filled with fillers

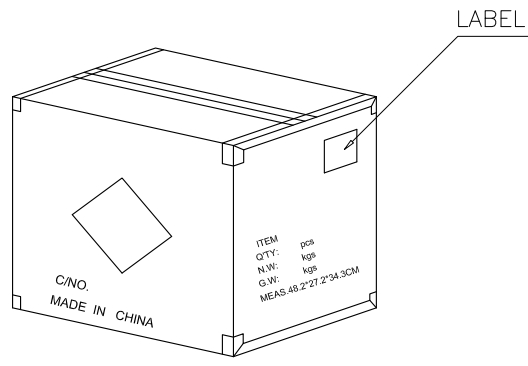

⑥ Paste the product or ROHS label as shown.

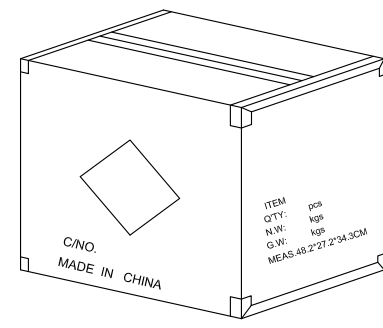

⑤ The outer box is sealed with transparent adhesive tape in the shape of "H".

Part Number			Product Description				
PI4FW-R23A-001			IEEE 1394 Receptacle, Horizontal, 6Pin, SMT, Top Mount, With Shell Stakes				
DWG.No.	P-I4F-001		Tolerances Unspecified			Units: Metric(mm)	ROHS COMPLIANT 2011/65/EU Deca-BDEv
Revision	A0		X.X	±0.35	X°	±5°	
Designed	Lee	10/20/20	X.XX	±0.25	X.X°	±2°	
Approved	Allen	10/20/20	X.XXX	±0.15			



WF
Connecting the Future

www.szywf.com.cn
www.szywf.cn

Sheet No. 2/2