
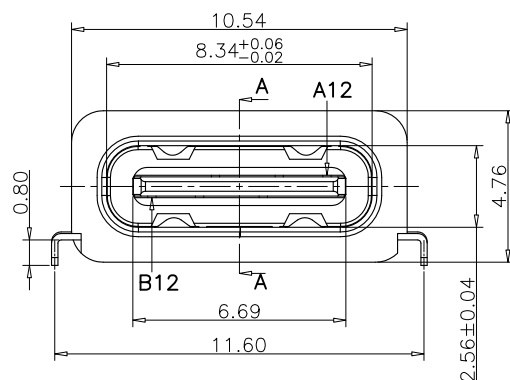
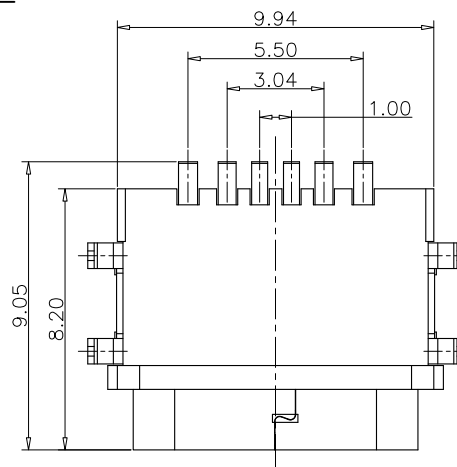
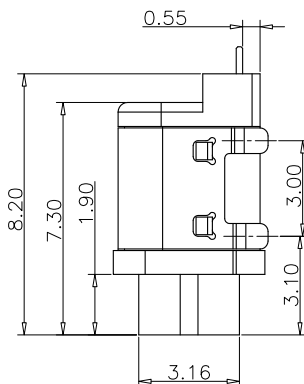


SECTION A-A
SCALE 1:1

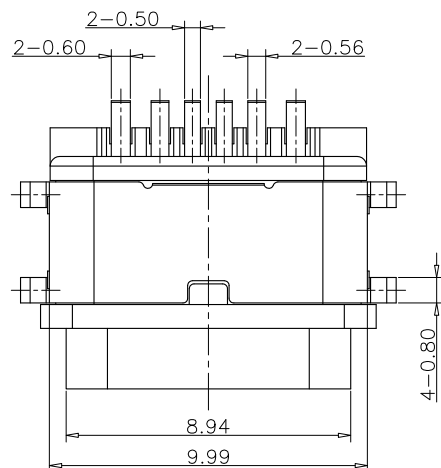

Specifications

A. Material

Insulator: LCP, UL94 V-0, Black
Contact: Copper Alloy, T=0.15mm
Mid Plate: Stainless Steel, T=0.15mm
Shell: Stainless Steel, T=0.30mm
Shielded Shell: Stainless Steel, T=0.20mm

B. Plating

Contact Area: 1u" Au over 60u" min. Nickel
Solder Tails: 80u" min. Matte Tin over 60u" min. Nickel
Shielded Shell: 60u" min Nickel.
Shell: 60u" min. Nickel
Mid Plate: No Plating

C. Electrical

Current Rating: 3.00A collectively for VBus & GND pins
1.25A for A5/B5 pins
0.25A for all other pins

Voltage Rating: 20V

Power Rating: 60W

Contact Resistance: 40mΩ max initial
50mΩ max after test

Dielectric Withstanding Voltage: 100V AC

Insulation Resistance: 100MΩ min.

D. Mechanical & Environmental

Operating Temperature: -25°C to +85°C

Mating Force: 5 to 20 N.

Unmated Force: 6 to 20 N after test

Durability: 10,000 cycles

Part Number			Product Description			
PTCFW-H22B-016			USB Type C Receptacle, Horizontal, SMT, Mid Mount, IP67, For Power Charging Only, 6 Pin			
DWG.No.	P-TCF-088		Tolerances Unspecified		Units:	
Revision	A0		X.X ±0.35	X° ±5°	Metric(mm)	
Designed	Lee	11/30/20	X.XX ±0.25	X.X° ±2°		
Approved	Allen	11/30/20	X.XXX ±0.15			




PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2

C







E


1	2	3	4	5	6	7
---	---	---	---	---	---	---

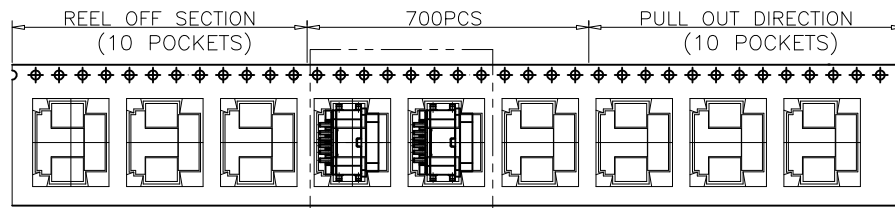

SEE DETAIL X

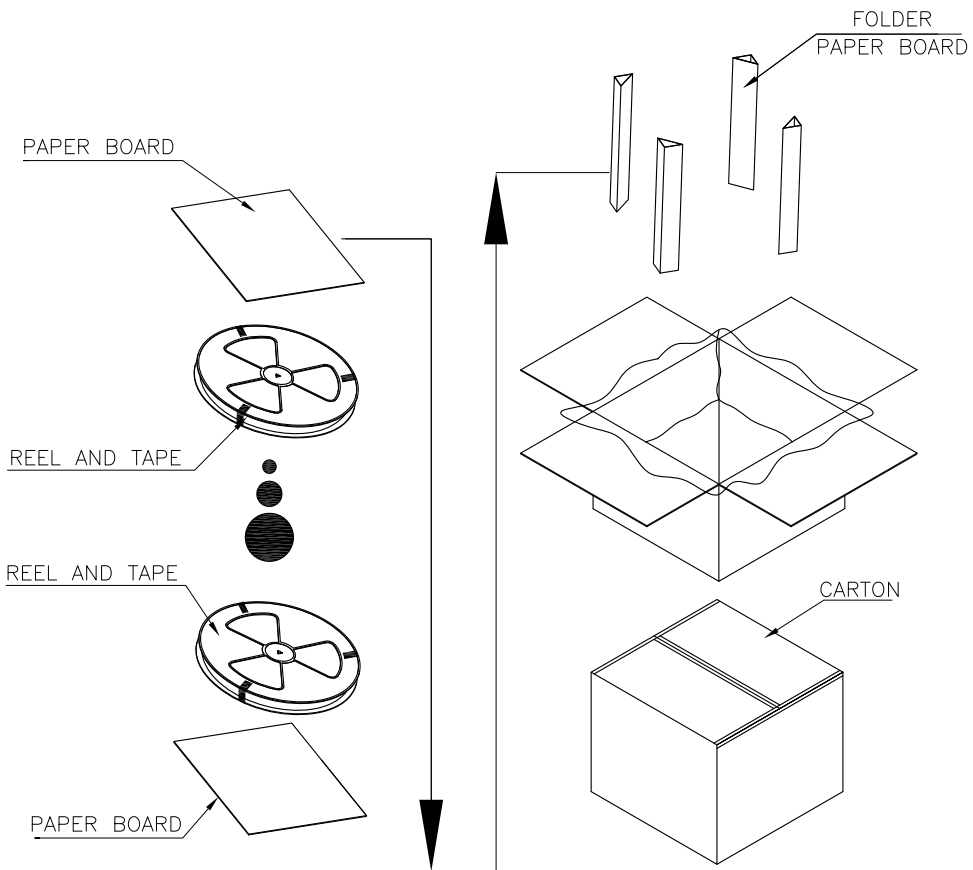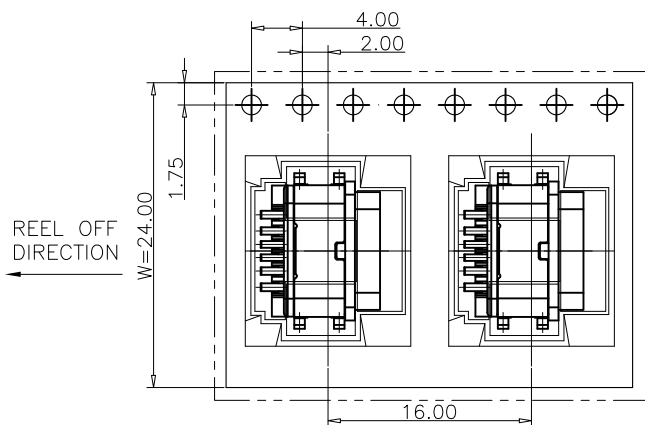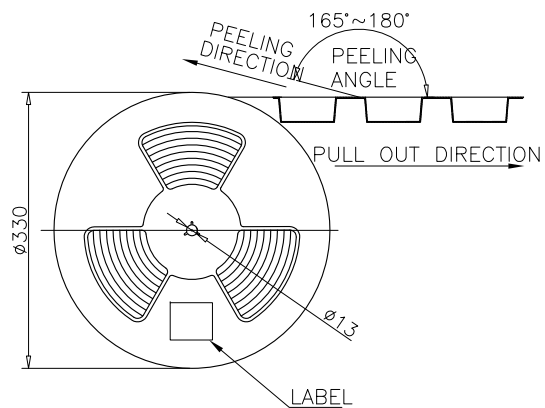

	REEL	CARTON
QUANTITY (PCS)	700	7000

Part Number			Product Description				 Connecting the Future www.szywf.com.cn www.szywf.cn
PTCFW-H22B-016			USB Type C Receptacle, Horizontal, SMT, Mid Mount, IP67, For Power Charging Only, 6 Pin				
DWG.No.	P-TCF-088		Tolerances Unspecified		Units: Metric(mm)		
Revision	A0		X.X ±0.35	X° ±5°			
Designed	Lee	11/30/20	X.XX ±0.25	X.X° ±2°			
Approved	Allen	11/30/20	X.XXX ±0.15				
							Sheet No. 3/3